

ARCHITECTURAL USL-SP42C Nokomis Suspended Pendant



OVERVIEW

The circular Nokomis pendant is built of a seamless aluminum body with an acrylic lens to evenly diffuse its up/down light. It is available in 5 ring sizes 16-48 inches and can be put in 3-level tiers. The suspension mounting allows for multiple rings to be placed even and concentric, or cable lengths can be adjusted to create a truly custom look.

FEATURES

- Up/down/out light
- Circular shape
- Rectangular profile
- 360° beam angle
- Custom configurations available
- RGB, RGBW, color tunable available



ORDERING INFORMATION

EXAMPLE PN: USL-SP42C-3-90WB-40K-10V-WHT

USL-SP42C	SIZE / POWER	CCT	DIMMING	FINISH*
1-20W	1 RING 20W 16"	27K 2700K	0 NONE	WHT MATTE WHITE
1-30W	1 RING 30W 24"	30K 3000K	10V 0-10V	BLK MATTE BLACK
1-40W	1 RING 40W 32"	35K 3500K		SLV SILVER
1-50W	1 RING 50W 40"	40K 4000K		ORB OIL RUBBED BRONZE
1-60W	1 RING 60W 48"	50K 5000K		PTN PLATINUM
2-50W	2 RINGS 50W 16" 24"	RGB RGB		BRG BURNISHED GOLD
2-90W	2 RINGS 90W 32" 40"	RGB30 RGB+3000K		RSG ROSE GOLD
2-90WB	2 RINGS 90W 40" 48"	RGB35 RGB+3500K		DKB DARK BURGUNDY
3-90W	3 RINGS 90W 16" 24" 32"	RGB40 RGB+4000K		
3-90WB	3 RINGS 90W 32" 40" 48"	RGB50 RGB+5000K		
		CT COLOR TUNING 3000-6000K		

*Note: Standard finishes are matte white, matte black, silver, and oil rubbed bronze.

ARCHITECTURAL USL-SP42C Nokomis Suspended Pendant



SPECIFICATIONS

MODEL	OPERATION VOLTAGE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-SP42C	100-277V AC	50,000 HOURS	2700K, 3000K 3500K, 4000K, 5000K	80+	75-89 lm/W

MODEL	RING SIZES (in)	POWER (W)	LUMENS (lm) at:			EFFICACY (lm/W)
			3000K	4000K	5000K	
USL-SP42C-1-20W	16	20	1,500	1,600	1,700	75-85
USL-SP42C-1-30W	24	30	2,350	2,450	2,550	78-85
USL-SP42C-1-40W	32	40	3,200	3,300	3,400	80-85
USL-SP42C-1-50W	40	50	4,050	4,150	4,250	81-85
USL-SP42C-1-60W	48	60	4,900	5,000	5,100	82-85
USL-SP42C-2-50W	16, 24	50	4,050	4,150	4,250	81-85
USL-SP42C-2-90W	32, 40	90	7,100	7,300	7,500	79-83
USL-SP42C-2-90WB	40, 48	90	7,250	7,450	7,650	81-85
USL-SP42C-3-90W	16, 24, 32	90	7,400	7,600	7,800	82-87
USL-SP42C-3-90WB	32, 40, 48	90	7,600	7,800	8,000	84-89



ARCHITECTURAL USL-SP42C Nokomis Suspended Pendant





DIMENSIONS

Standard ring configurations below. Additional custom configurations available.

MODEL	A RING 1	B RING 2	C RING 3	WEIGHT
1-20W	16 in 400mm	NA	NA	5.3lb 2.4 kg
1-30W	24 in 600 mm	NA	NA	6.6 lb 3.0 kg
1-40W	32 in 800 mm	NA	NA	7.9 lb 3.6 kg
1-50W	40 in 1000mm	NA	NA	9.3lb 4.2 kg
1-60W	48 in 1200 mm	NA	NA	10.6 lb 4.8 kg
2-50W	16 in 400mm	24 in 600 mm	NA	9.3lb 4.2 kg
2-90W	32 in 800 mm	40 in 1000mm	NA	15 lb 6.8 kg
2-90WB	40 in 1000mm	48 in 1200 mm	NA	17.6 lb 8.0 kg
3-90W	16 in 400mm	24 in 600 mm	32 in 800 mm	15 lb 6.8 kg
3-90WB	32 in 800 mm	40 in 1000mm	48 in 1200 mm	22.9 lb 10.4 kg

L LENGTH	H HEIGHT
9.8 in 250 mm	2.4in 60 mm

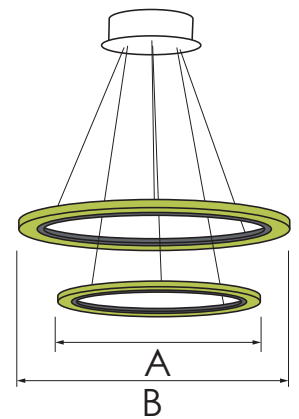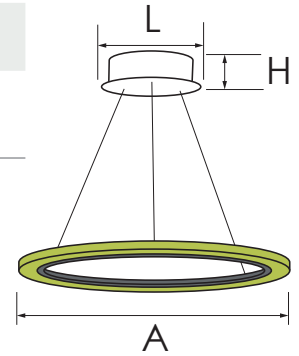

Profile view

