

INTERIOR USL-ARK1D

Mini Configurable Strip Light



Interior Warranty

OVERVIEW

This modular mini light bar has a wide variety of adapters and connectors, making the installation highly customizable. Up to 16 feet (5 meters) can be connected to one power supply. The remote driver reduces heat and lengthens the lifespan of the product.



FEATURES

- 120° beam angle
- IP20
- Magnetic mounting, brackets available
- Connect maximum 10 pieces per power supply
- Seamless connections




ORDERING INFORMATION

EXAMPLE PN: USL-ARK1D-20-40K-12V


USL-ARK1D	-	LENGTH	-	CCT	-	VOLTAGE
		8 8 INCH		30K 3000K		12V 12V DC
		12 12 INCH		40K 4000K		24V 24V DC
		16 16 INCH		50K 5000K		
		18 18 INCH				
		20 20 INCH				
		40 40 INCH				

ACCESSORIES


USL-ARK1D-ACC	-	ACCESSORY
L		Left adapter
LT		Left T adapter
R		Right adapter
RT		Right T adapter
X		Cross connector
ET		End T adapter
END		End cap
PWRCORD		Power cord
JMP		Middle jumper
MNT		Mounting bracket
SCRW		Mounting screws




Left Adapter




Left T Adapter




Cross Connector



Right Adapter




Right T Adapter



End T Adapter



Middle Jumper



Power Cord



End Cap



Mounting Bracket

Note: 2 screws and mounting brackets are included with each segment.

INTERIOR USL-ARK1D

Mini Configurable Strip Light




SPECIFICATIONS

MODEL	OPERATION VOLTAGE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-ARK1D	12V DC	50,000 HOURS	3000K, 4000K, 5000K	90+	103-122 lm/W


MODEL	POWER (W)	LUMENS (lm) ±10%			EFFICACY (lm/W)
		3000K	4000K	5000K	
USL-ARK1D-8	2.9	300	320	340	103-117
USL-ARK1D-12	4.3	450	470	490	105-114
USL-ARK1D-16	5.76	600	640	680	104-118
USL-ARK1D-18	6.5	680	725	760	105-117
USL-ARK1D-20	7.56	820	870	920	108-122
USL-ARK1D-40	15.12	1640	1740	1840	108-122

DIMENSIONS


MODEL	L FIXTURE LENGTH	A POWER CORD WIRE LENGTH	B POWER CORD + CONNECTOR	H HEIGHT	W WIDTH
USL-ARK1D-8	8 in 205 mm	5.9 in 150 mm	7.5 in 190 mm	0.39 in 10 mm	0.5 in 12.6 mm
USL-ARK1D-12	11.74 in 298 mm				
USL-ARK1D-16	15.63 in 397 mm				
USL-ARK1D-18	17.7 in 450 mm				
USL-ARK1D-20	20.16 in 512 mm				
USL-ARK1D-40	39.89 in 1014 mm				

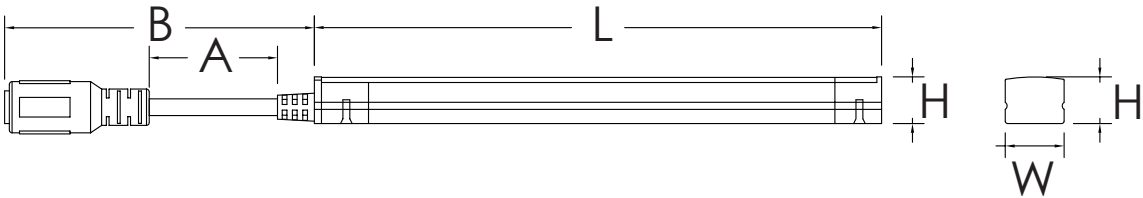

CONNECTING PIECES

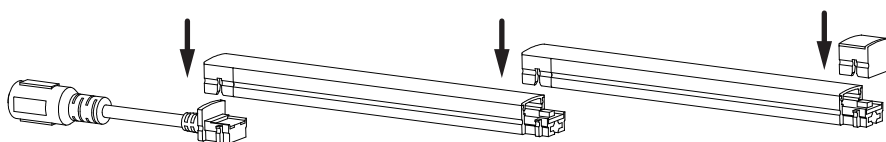

MOUNTING WITH BRACKETS

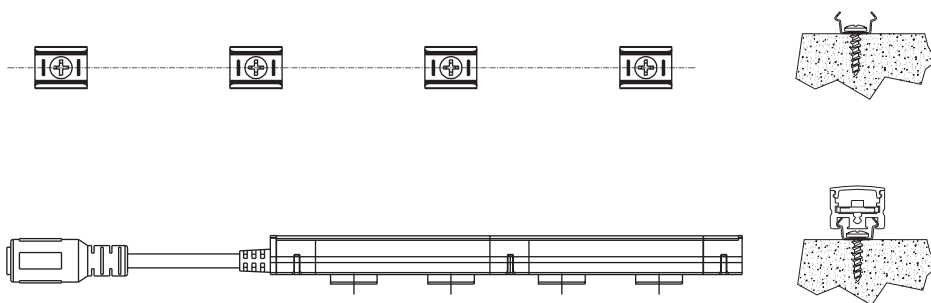

MOUNTING WITH MAGNETS

