

ARCHITECTURAL USL-VRM3Q Vermilion Suspended Pendant



PROJECT		TYPE		DATE	
---------	--	------	--	------	--

Architectural
 Interior
 Damp Location
 Dimmable
 AC
 Up/Down
 POE
 5 Year Warranty
 ETL LISTED


OVERVIEW

This pendant is available in sizes ranging from 2-foot diameter to 16-foot diameter. The profile is 1.3inch x 1.5 inch. Suspension is the standard mounting method, but it is also available as surface mounted. Options available for down light or up/down.



FEATURES

- Custom RAL finishes available
- 120° beam angle
- Direct & indirect lighting
- Standard cable length is 1.5m (~5ft)
- Central canopy suspension or direct suspension possible
- 80 CRI standard, 90 CRI optional

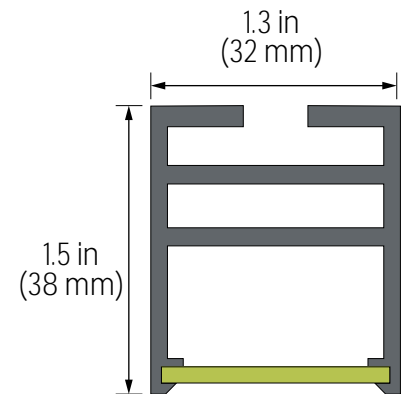

ORDERING INFORMATION

EXAMPLE PN: USL-VRM3Q-7-120WD-30K-10V-W

USL-VRM3Q	SIZE / POWER*	CCT	DIMMING	BODY COLOR
2-40WD	23.6 INCH, 40W, DOWN LIGHT	30K 3000K	0 NONE	W MATTE WHITE
3-50WD	35.4 INCH, 50W, DOWN LIGHT	40K 4000K	10V 0-10V	B MATTE BLACK
4-80WD	47.2 INCH, 80W, DOWN LIGHT	50K 5000K	POE NO DRIVER (FOR POE)	G SILVER
5-100WD	59.1 INCH, 100W, DOWN LIGHT			#### CUSTOM RAL
7-120WD	78.8 INCH, 120W, DOWN LIGHT			
10-200WD	118.1 INCH, 200W, DOWN LIGHT			
16-400WD	196.9 INCH, 400W, DOWN LIGHT			
3-80WU	35.4 INCH, 80W, UP/DOWN LIGHT			
4-120WU	47.2 INCH, 120W, UP/DOWN LIGHT			
5-135WU	59.1 INCH, 135W, UP/DOWN LIGHT			
7-150WU	78.7 INCH, 150W, UP/DOWN LIGHT			
10-300WU	118.1 INCH, 300W, UP/DOWN LIGHT			
16-480WU	196.9 INCH, 480W, UP/DOWN LIGHT			

*Note: 2 foot model not available in up/down

ARCHITECTURAL USL-VRM3Q Vermilion Suspended Pendant



SPECIFICATIONS

MODEL	OPERATION VOLTAGE	OPERATING TEMPERATURE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-VRM3Q	120-277V	-4°F – 104°F -20°C – 40°C	50,000 HOURS	3000K, 4000K, 5000K	80+	85 lm/W

MODEL	DOWN LIGHT		UP/DOWN LIGHT		EFFICACY (lm/W)
	POWER (W)	LUMENS ±10%	POWER (W)	LUMENS ±10%	
USL-VRM3Q-2	40	3,400	NA	NA	85
USL-VRM3Q-3	50	4,250	80	6,800	85
USL-VRM3Q-4	80	6,800	120	10,200	85
USL-VRM3Q-5	100	8,500	135	11,475	85
USL-VRM3Q-7	120	10,200	150	12,750	85
USL-VRM3Q-10	200	17,000	300	25,500	85
USL-VRM3Q-16	400	34,000	480	40,800	85

POE OPERATING DETAILS

MODEL	CURRENT	VOLTAGE
USL-VRM3Q-7	3x 1A	36V
USL-VRM3Q-10	5x 1A	

DIMENSIONS

MODEL	D DIAMETER	A CANOPY SIZE
USL-VRM3Q-2	23.6in 600mm	10 in 250 mm
USL-VRM3Q-3	35.4in 900mm	
USL-VRM3Q-4	47.2in 1200mm	
USL-VRM3Q-5	59.1in 1500mm	14in 350mm
USL-VRM3Q-7	78.8in 2000mm	
USL-VRM3Q-10	118.1in 3000mm	18 in 450 mm
USL-VRM3Q-16	196.9in 5000mm	20in 500 mm

