

# INTERIOR USL-GLLIS GroLinear Vegetative Light




## OVERVIEW

This grow light contains 8 modules which can be configured in a variety of shapes. Each module features a built-in heat sink to eliminate the need for fans. The linear shape allows it to illuminate large areas while minimizing the blocked sunlight in greenhouse applications.

## FEATURES

- IP66
- Efficacy: 2.1 umol/j
- Average PPF: 500umol/m<sup>2</sup>/S
- Mounting height 2 feet above canopy (90°)
- Mounting height 1 feet above canopy (120°)
- 400W LED replaces 1,000W HPS
- Coverage area: 4x4 feet
- Uniform light intensity

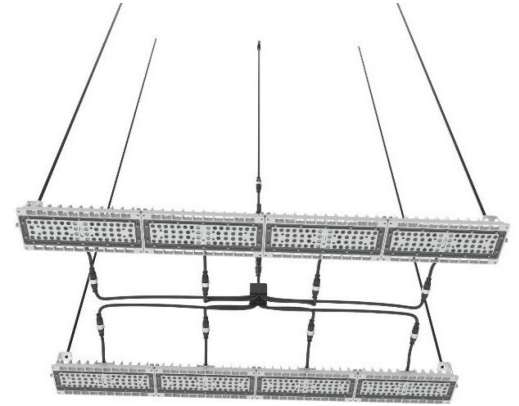

## ORDERING INFORMATION

EXAMPLE PN: USL-GLLIS-400W-120V

USL-GLLIS	POWER*	VOLTAGE	BEAM ANGLE
	<b>400W</b> 8 MODULES, 400W	<b>120V</b> 120 VOLTS	<b>90D</b> 90 DEGREES
		<b>240V</b> 208-240 VOLTS	<b>120D</b> 120 DEGREES
		<b>277V</b> 277 VOLTS	

Note: this fixture is composed of 8 50W modules.

# INTERIOR USL-GLLIS GroLinear Vegetative Light



## SPECIFICATIONS


MODEL	OPERATION VOLTAGE	OPERATING TEMPERATURE	RATED LIFESPAN	CCT	EFFICACY
USL-GLLIS	120V, 240V AC	-40°F - 122°F -40°C - 50°C	50,000 HOURS	FULL SPECTRUM	2.1 umol/J

MODEL	PPFD	EFFICACY	POWER	REPLACES HPS
USL-GLLIS-400W	500 umol/m <sup>2</sup> /S	2.1 umol/J	400 W	1000 W


## DIMENSIONS\*

PORTION	L	W	H	WEIGHT
<b>1 MODULE: 50W</b>	10.5 in 265 mm	4.5 in 114 mm	1.5 in 40 mm	2.65 lb 1.2 kg
<b>HALF FIXTURE: 200W</b>	42.5 in 1080 mm	4.5 in 114 mm	1.5 in 40 mm	10.2 lb 4.6 kg
<b>FULL FIXTURE: 400W</b>	42.5 in 1080 mm	2x 4.5 in 2x 114 mm	1.5 in 40 mm	20.2 lb 9.2 kg


Note: Dimensions assume a continuous line of 1x4 (200W) or 2x4 (400W). Due to the modular nature, additional configurations are available and will affect overall dimensions.

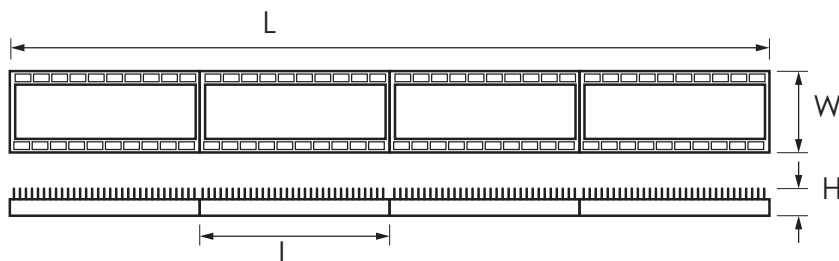

## LIGHT SPECTRUM

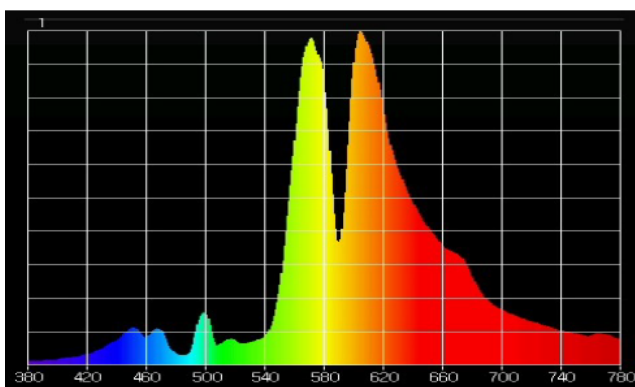

HPS GROW LIGHT

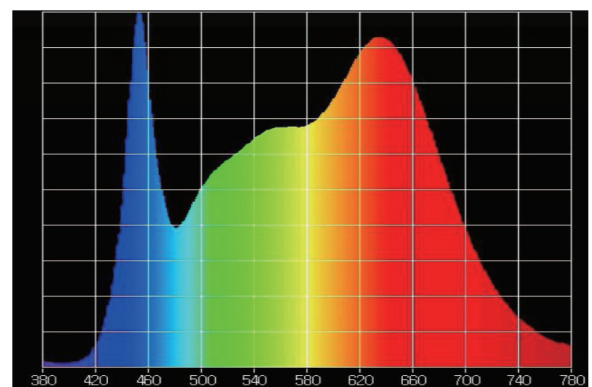

LED GROW LIGHT