


Flora-360W

(Vertical Panel Light)

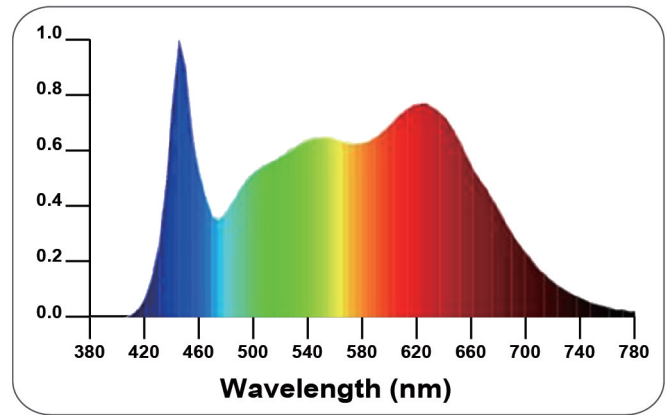

ORDERING INFORMATION

EXAMPLE PN: USL-GLFIS-360W-VI


USL-GLFIS	SIZE / POWER	VOLTAGE
	360W 360 WATTS	V1 120V
	720W 720 WATTS	V2 208V
		V3 240V
		V4 277V

SPECIFICATIONS

Model	Flora-360W
Light Source	LED
PPF	936 umol/s
Input Power	360W
Efficacy	2.3umol/J
Input Voltage	AC 120V ^① 208V ^② 240V ^③ 277V ^④
Lifetime	>50,000 Hours
Dimming	0-10V
BTUs	1232
Mounting Height	8 inches
Fixture Dimensions	45.0" L x 28.0" W x 2.0" H
Fixture Weight	15.50lbs
Certification	ETL Certified & IP66, CE
Warranty	3 Year Standard or 5 Year Extended Warranty



Max Amperage By Voltage Service

Voltage	120V	208V	240V	277V
Amperage	3.0A	1.8A	1.5A	1.3A

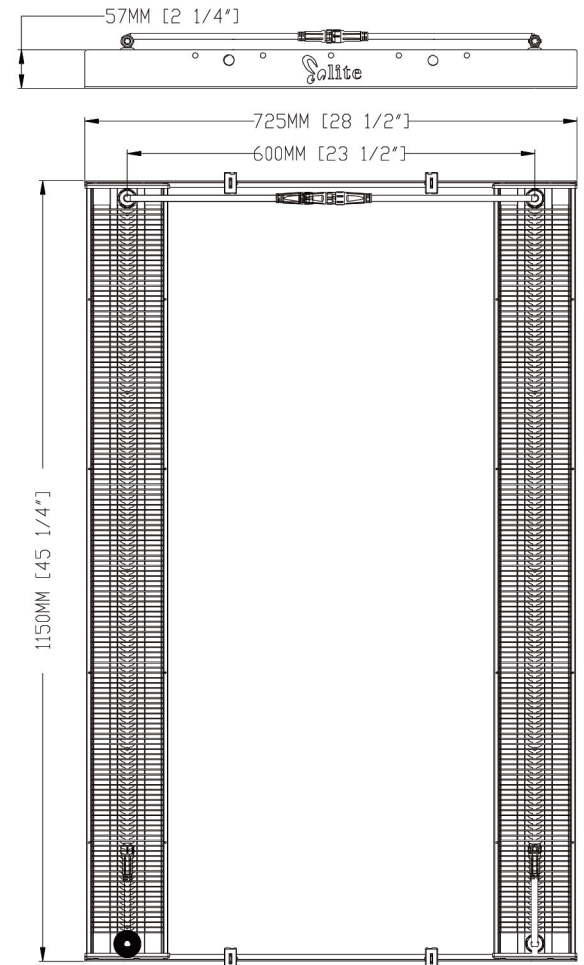

Flora-720


(Vertical Panel Light)

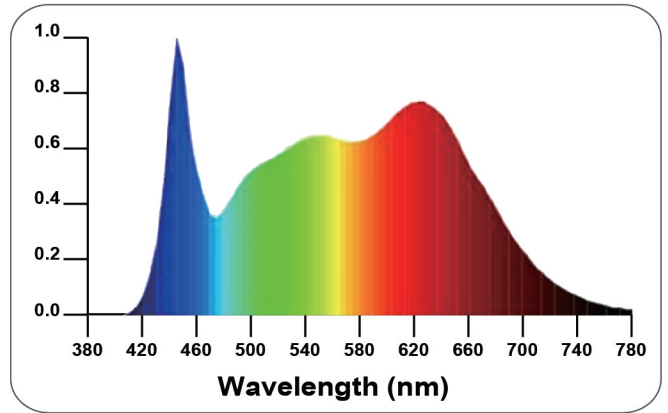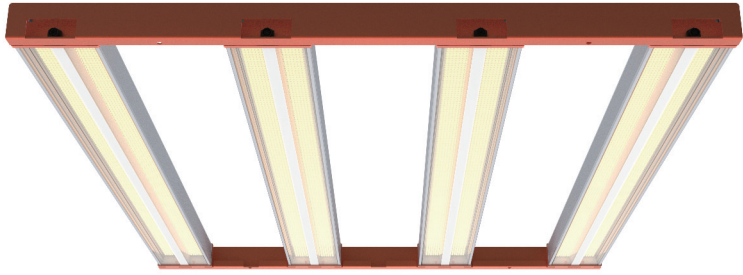

ORDERING INFORMATION

EXAMPLE PN: USL-GLFIS-360W-VI

USL-GLFIS	SIZE / POWER	VOLTAGE
	360W 360 WATTS	V1 120V
	720W 720 WATTS	V2 208V
		V3 240V
		V4 277V

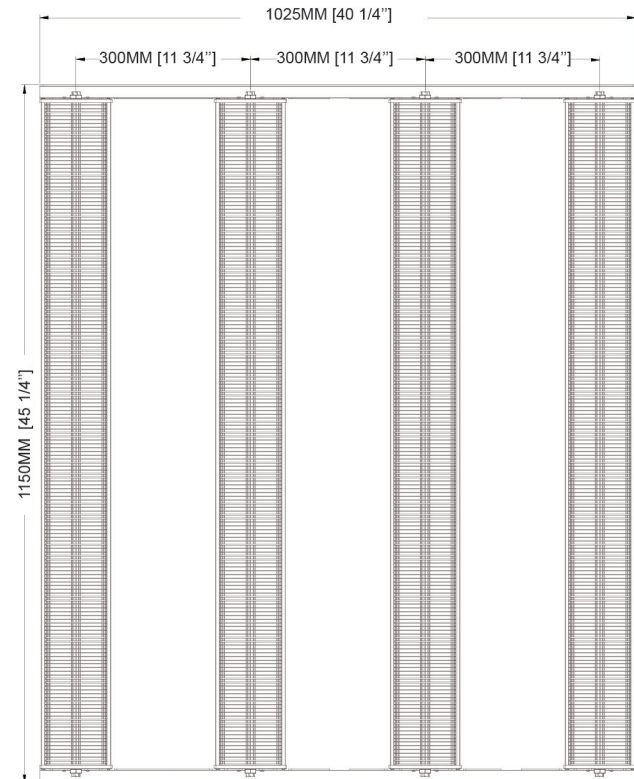

SPECIFICATIONS

Model	Flora-720
Light Source	LED
PPF	1656 umol/s
Input Power	720W
Efficacy	2.3umol/J
Input Voltage	AC 120V ^① 208V ^② 240V ^③ 277V ^④
Lifetime	>50,000 Hours
Dimming	Wireless 0-100%
BTUs	2448
Mounting Height	8 inches
Fixture Dimensions	45.0" L x 40.0" W x 2.0" H
Fixture Weight	28.50lbs
Certification	ETL Certified & IP66, CE
Warranty	3 Year Standard or 5 Year Extended Warranty

Max Amperage By Voltage Service

Voltage	120V	208V	240V	277V
Amperage	6.0A	3.46A	3.0A	2.6A