

EXTERIOR USL-AL21C

1-Arm Circular Post Light




Exterior


Wet Location


Dimmable


5 Year Warranty





OVERVIEW

US Luminaire's circular post light is a sleek solution for lighting pathways, parking areas, parks, and other outdoor spaces. The aluminum body features an integrated heat sink for an extended lifespan.

FEATURES

- IP66
- Precision die cast aluminum housing
- Fade-resistant powder coat finish
- Toughened glass lens
- Outdoor, wet location environment
- Easy installation
- High quality LEDs
- Cast aluminum thermal management for optimal heat sinking
- Tamper-proof hardware



ORDERING INFORMATION

EXAMPLE PN: USL-AL21C-50W-40K-D-10V-2-0

USL-AL21C	-	POWER	-	CCT	-	FINISH	-	OPTIONS*	-	MOUNTING	-	PHOTOCELL
		30W 30 WATTS		30K 3000K		D DARK BRONZE		10V 0-10V DIMMING		2 2 3/8" TENON		0 NONE
		50W 50 WATTS		40K 4000K						3 3" TENON		P PHOTOCELL
		70W 70 WATTS		50K 5000K								
		100W 100 WATTS		60K 6000K								

EXTERIOR USL-AL21C

1-Arm Circular Post Light




SPECIFICATIONS

MODEL	OPERATION VOLTAGE	AMBIENT OPERATING TEMP	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-AL21C	100-277V AC	-22°F – 104°F -30°C – 40°C	60,000 HOURS	3000K, 4000K 5000K, 6000K	70+	120-130 lm/W


MODEL	POWER (W)	LUMENS (lm)	EFFICACY (lm/W)	EQUIVALENT
USL-AL21C-30W	30	3600-3900	120-130	70-100W MH/HPS
USL-AL21C-50W	50	6000-6500	120-130	100-150W MH/HPS
USL-AL21C-70W	70	8400-9100	120-130	150-250W MH/HPS
USL-AL21C-100W	100	12,000-13,000	120-130	250-400W MH/HPS

DIMENSIONS

MODEL	D DIAMETER	W MAX WIDTH	H HEIGHT
ALL	14.96 in 380 mm	15.75 in 400 mm	21.02 in 534 mm

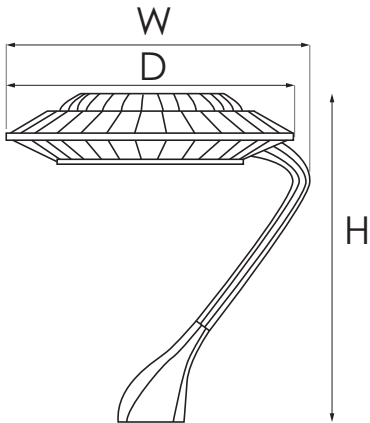

PHOTOMETRICS

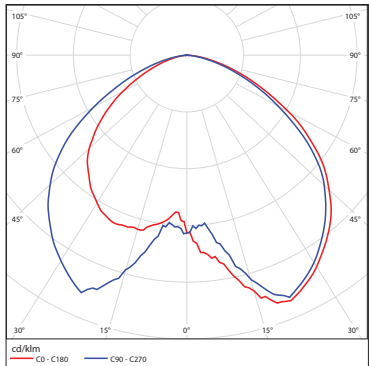

PACKAGING INFORMATION

MODEL	NET WEIGHT	GROSS WEIGHT
USL-AL21C-30W	12.8 lb 5.8 kg	15.2 lb 6.9 kg
USL-AL21C-50W	13 lb 5.9 kg	15.4 lb 7.0 kg
USL-AL21C-70W	13.2 lb 6.0 kg	15.7 lb 7.1 kg
USL-AL21C-100W	13.6 lb 6.15 kg	15.9 lb 7.2 kg