

ARCHITECTURAL USL-SPI2C

Adley Suspended Pendant



PROJECT		TYPE		DATE	
---------	--	------	--	------	--


Architectural
 Interior
 Dry Location
 Dimmable
 AC
 Color Tuning
 Color Select
 RGB
 DMX
 Up/Down
 5 Year Warranty
 UL

OVERVIEW

The Adley pendant is circular with up and down light. It is built with seamless aluminum with a diffusing acrylic lens. RGB and color tuning options available. Works with DMX and Zigbee.

FEATURES

- Up/down light
- Circular shape
- 360° beam angle
- 0-10V dimming
- DMX and Zigbee controls

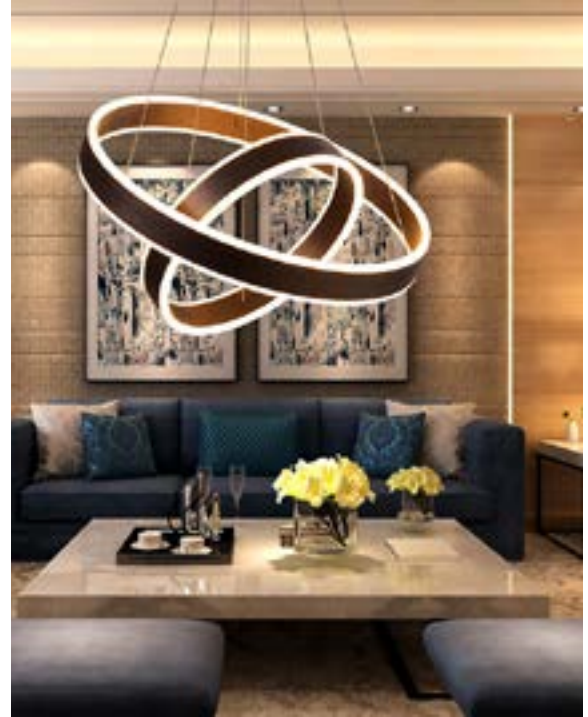

ORDERING INFORMATION

EXAMPLE PN: USL-SPI2C-16-20W-DMX-RGB30-DB

USL-SPI2C	SIZE / POWER	CONTROLS	CCT/COLOR	FINISH*
	16-20W 16" 20W	10V 0-10V	CS COLOR-SELECTABLE 3000K/3500K/4000K	BK BLACK
	24-30W 24" 30W	DMX DMX		GW GLOSSY WHITE
	32-40W 32" 40W	ZB ZIGBEE	CT COLOR-TUNABLE 3000K-4000K	SV SILVER
	40-50W 40" 50W		RGB30 RGBW WITH 3000K	DB BRONZE
	48-60W 48" 60W		RGB40 RGBW WITH 4000K	
	60-70W 60" 70W			
	72-80W 72" 80W			

*Note: Black, glossy white, silver, and bronze are standard colors. Additional premium colors available.

STANDARD COLORS

DB BRONZE
 SV SILVER
 BK BLACK
 GW GLOSSY WHITE

PREMIUM COLORS

SW SATIN WHITE
 GB GLOSSY BLACK
 GH CHROME
 BR BRASS
 BG BEIGE
 BL BLUE
 PR PURPLE
 VT VIOLET
 PK PINK
 RD RED
 OR ORANGE
 YL YELLOW

ARCHITECTURAL USL-SPI2C Adley Suspended Pendant



SPECIFICATIONS


MODEL	OPERATION VOLTAGE	OPERATING TEMPERATURE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-SPI2C	100-277V AC	-40°F – 122°F -40°C – 50°C	50,000 HOURS	3000K-4000K RGBW	80+	75-85 lm/W

MODEL	RING SIZE	POWER (W)	LUMENS (lm) ±10%			EFFICACY (lm/W)
			3000K	4000K	5000K	
USL-SPI2C-16-20W	16	20	1,500	1,600	1,700	75-85
USL-SPI2C-24-30W	24	30	2,350	2,450	2,550	78-85
USL-SPI2C-32-40W	32	40	3,200	3,300	3,400	80-85
USL-SPI2C-40-50W	40	50	4,050	4,150	4,250	81-85
USL-SPI2C-48-60W	48	60	4,900	5,000	5,100	82-85
USL-SPI2C-60-70W	60	70	5,550	5,750	5,950	79-85
USL-SPI2C-72-80W	72	80	6,350	6,550	6,800	79-85

DIMENSIONS

MODEL	D DIAMETER	WEIGHT
USL-SPI2C-16-20W	15.57 in	5.1 lbs
USL-SPI2C-24-30W	23.62 in	6.4 lbs
USL-SPI2C-32-40W	31.50 in	7.7 lbs
USL-SPI2C-40-50W	29.37 in	9.0 lbs
USL-SPI2C-48-60W	47.24 in	10.4 lbs
USL-SPI2C-60-70W	59.06 in	13.0 lbs
USL-SPI2C-72-80W	70.87 in	16.0 lbs

CANOPY	A HEIGHT	B DIAMETER
0-10V, COLOR SELECTABLE	1.97 in	9.8 in
ZIGBEE, DMX	2.76 in	11.81 in

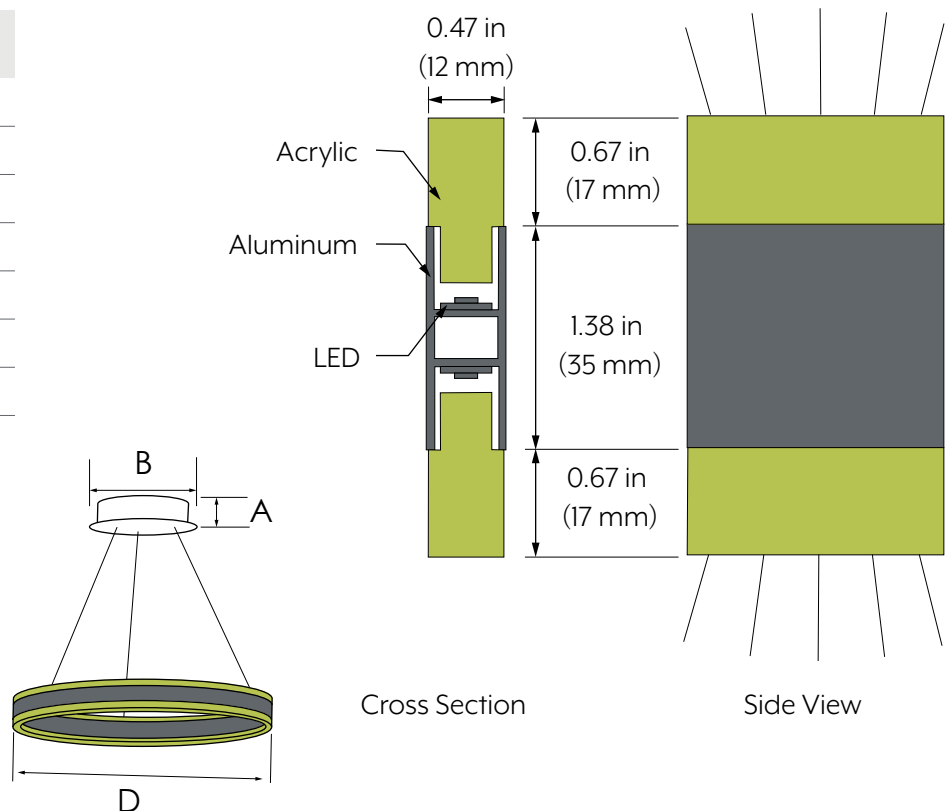

STANDARD MULTI-RING CONFIGURATIONS

SIZE	2 TIERS				3 TIERS				4 TIERS		5 TIERS	
	50W	90W	110W	150W	90W	150W	180W	210W	220W	260W	240W	290W
16	X				X							
24	X				X							
32		X			X	X			X		2	
40		X	X			X	X		X	X	2	2
48			X			X	X	X	X	X	1	2
60				X			X	X	X	X		1
72				X				X		X		

