

# USL-VN42L-24-17W-30K

CRI 90 3000K 1300 Lumens LED Half-round vanity light



usLuminaire™  
expect brilliance

## Performance

- Designed to provide 35,000 hours of life
- Energy-saving & Super bright, saving 75% energy compared with traditional troffer
- ETL compliant, for use in damp locations

## Construction

Steel base with white powder coating.

- PC LENS



## Installation

- Size: L24"(609.6mm)\*H4.22"(107mm)\*W6"(152.4mm)



## Specifications

Category	LED Vanity Light	Individual Box LENGTH (INCH)	25
Bulb Base Type	INTEGRATED LED	Individual Box Width (INCH)	6.3
Bulb Base Finish	N/A	Individual Box HEIGHT (INCH)	4.53
Color Temperature	3000K	Individual Box Weight per Unit (LBS)	4
Beam Angle	105		
Finish	WHITE		
CRI	90		
Average Life (Hours)	35000		
Estimated Yearly Energy Cost (11 ¢/Kwh)	2.05		
Life Based On 3Hrs/Day (Years)	31.96	Lamp Type	LED
Product Length (Inch)	24"	Bulb Shape	N/A
Product Width (Inch)	6"	Dry/Wet/Damp	Damp
Product Height (Inch)	4.22	Energy Star	N/A
Product Extension (Inch)	N/A	Power Factor	0.95
Product Weight Per Unit (Lbs)	3.03	Current	0.2A
Dimmable	YES	Lumen/Watt	76
Watts	17W	Warranty (Year)	5
Watt Equivalent	100W	DLC (Yes/No)	NO
Lumens	1300	Input Voltage	120V
Certification (UL/ETL/FCC)	ETL	Housing Material	METAL
		Lens	Acrylic
		Led Type	LM80 Local chips

# USL-VN42L-24-28W-50K

CRI 80 5000K 2520Lumens LED Vanity light



usLuminaire™  
expect brilliance

The high performance LED Vanity light

## Performance

- Designed to provide 50,000 hours of life
- Energy-saving & Super bright, saving 75% energy compared
- UL compliant, for use in damp locations





## Construction

- Die-formed cold-rolled steel with powder coated paint High transmission wht acrylic lens with satin nickel trim

## Installation

- wall mount
- Size:  $\Phi 24.8''$ (630mm)\*H4.11''(104.5mm)\*E5''(126.5mm)

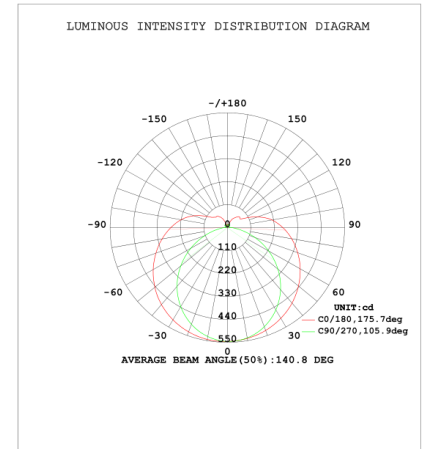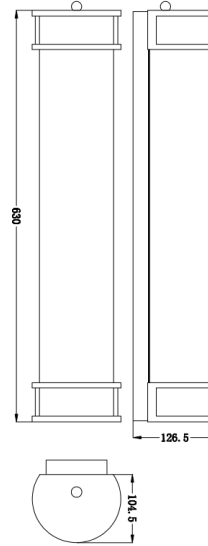

Category	LED Vanity light	Individual Box Length (Inch)	26.1
Shape	N/A	Individual Box Width (Inch)	6.53
Bulb Base Type	Integrated LED	Individual Box Height (Inch)	6.89
Bulb Base Finish	N/A	Individual Box Weight Per Unit (Lbs)	1.8
Color Temperature	5000K		
Beam Angle	140°		
Finish	White		
CRI	80		
Average Life (Hours)	50000		
Estimated Yearly Energy Cost (11 ¢ /Kwh)	3.37	Lamp Type	Vanity
Life Based On 3Hrs/Day (Years)	45.66	Bulb Shape	elongated
Product Length (Inch)	24.8	Dry/Wet/Damp	Damp
Product Width (Inch)	N/A	Energy Star	yes
Product Height (Inch)	4.11	Power Factor	0.9
Product Extension (Inch)	5	Current	255MA
Product Weight Per Unit (Lbs)	2.6	Lumen/Watt	90
Dimmable	YES	Warranty (Year)	3
Watts	28W	DLC (Yes/No)	N/A
Watt Equivalent	N/A	Input Voltage	120V;60Hz
Lumens	2520	Housing Material	Die-formed cold-rolled steel
Certification (UL/ETL/FCC)	UL	Lens	PC
		Led Type	EVERLIGHT

# USL-VN42L-36-26W-30K



usLuminaire™  
expect brilliance

CRI 90 3000K 2150LM LED Vanity light

## Performance

- Designed to provide 35,000 hours of life
- Energy-saving & Super bright, saving 75% energy compared with traditional troffer
- ETL compliant, for use in damp locations

## Construction

Steel base with white powder coating.

white diffuse PC lens



## Installation

- Size: L36"\*W6"\*H4.22"



## Specifications

Category	LED Vanity Light		
Bulb Base Type	INTEGRATED LED		
Bulb Base Finish	N/A		
Color Temperature	3000K		
Beam Angle	105°		
Finish	White		
CRI	90		
Average Life (Hours)	35000		
Estimated Yearly Energy Cost (11 ¢/Kwh)	3.13		
Life Based On 3Hrs/Day (Years)	31.96	Lamp Type	LED
Product Length (Inch)	36"	Bulb Shape	N/A
Product Width (Inch)	6"	Dry/Wet/Damp	Damp
Product Height (Inch)	4.22"	Energy Star	N/A
Product Extension (Inch)	N/A	Power Factor	0.9
Product Weight Per Unit (Lbs)	5.51	Current	0.2A
Dimmable	YES	Lumen/Watt	82
Watts	26W	Warranty (Year)	5
Watt Equivalent	200	DLC (Yes/No)	NO
Lumens	2150	Input Voltage	120V
Certification (UL/ETL/FCC)	ETL	Housing Material	METAL
		Lens	Acrylic
		Led Type	LM80 Local chips

# USL-VN42L-36-36W-50K

CRI 80 5000K 2880Lumens LED Vanity light



usLuminaire™  
expect brilliance

The high performance LED Vanity light

## Performance

- Designed to provide 50,000 hours of life
- Energy-saving & Super bright, saving 75% energy compared
- UL compliant, for use in damp locations




## Construction


- Die-formed cold-rolled steel with powder coated paint

## Installation

- wall mount
- Size:  $\Phi 36.81''(935\text{mm}) \times H 5.48''(139\text{mm}) \times E 5''(127\text{mm})$

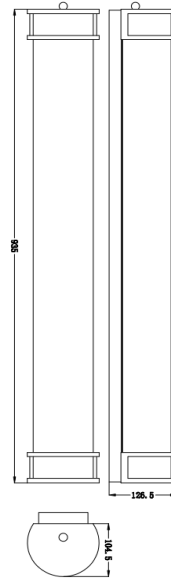

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

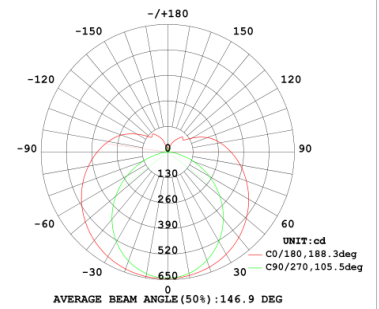

## Specifications

Category	LED Vanity light	Individual Box Length (Inch)	38.38
Shape	N/A	Individual Box Width (Inch)	6.89
Bulb Base Type	Integrated LED	Individual Box Height (Inch)	6.89
Bulb Base Finish	N/A	Individual Box Weight Per Unit (Lbs)	2.64
Color Temperature	5000K		
Beam Angle	140°		
Finish	White		
CRI	80		
Average Life (Hours)	50000		
Estimated Yearly Energy Cost (11 ¢/Kwh)	4.34	Lamp Type	Vanity
Life Based On 3Hrs/Day (Years)	45.66	Bulb Shape	elongated
Product Length (Inch)	36.8	Dry/Wet/Damp	Damp
Product Width (Inch)	N/A	Energy Star	yes
Product Height (Inch)	5.48	Power Factor	0.9
Product Extension (Inch)	5	Current	500MA
Product Weight Per Unit (Lbs)	5.75	Lumen/Watt	80
Dimmable	YES	Warranty (Year)	3
Watts	36W	DLC (Yes/No)	N/A
Watt Equivalent	N/A	Input Voltage	120V
Lumens	2880	Housing Material	Die-formed cold-rolled steel
Certification (UL/ETL/FCC)	UL	Lens	PC
		Led Type	EVERLIGHT