

# Integrated T-Bar Ceiling Linear Fixture



PROJECT		TYPE		DATE	
---------	--	------	--	------	--

Architectural
 Interior
 Damp Location
 Dimmable
 AC
 Down Light
 5 Year Warranty
 DLC
 UL


## OVERVIEW

This luminaire is integrated onto a T-bar so it can replace sections of the grid in a suspended ceiling to provide integrated light. Multiple segments can be placed adjacent to create a seamless light flow. It can replace any 2-foot or 4-foot section of grid, allowing a highly flexible lighting layout.



## FEATURES

- Remote Driver supports POE
- 120° Beam angle
- 0-10V dimming
- Fits 9/16" and 15/16" grid ceilings
- LM79
- One driver powers 3 fixtures

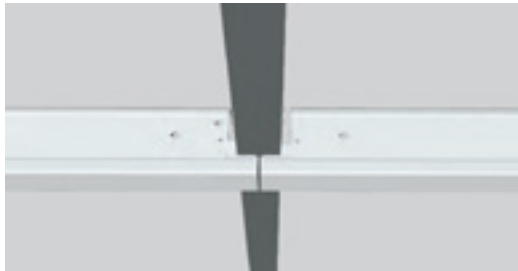

## ORDERING INFORMATION

EXAMPLE PN: USL-TBIF-10W-2FT-1516-40K-10V

USL-TBIF	SIZE / POWER	SIZE	CCT	DIMMING
	<b>10W-2FT</b> 10 WATTS, 2 FEET	<b>916</b> 9/16"	<b>35K</b> 3500K	<b>10V</b> 0-10V DIMMING
	<b>20W-4FT</b> 20 WATTS, 4 FEET	<b>1516</b> 15/16"	<b>40K</b> 4000K	
			<b>50K</b> 5000K	

### ACCESSORIES

USL-TBIF-ACC	ACCESSORY
<b>PWR-30W</b>	30W power supply
<b>PWR-60W</b>	60W power supply

## SPECIFICATIONS

MODEL	OPERATION VOLTAGE	OPERATING TEMPERATURE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-TBIF	100-277V AC	-4°F – 104°F -20°C – 40°C	50,000 HOURS	3500K, 4000K, 5000K	80+	110-130 lm/W

MODEL	POWER (W)	LUMENS (lm)	EFFICACY (lm/W)	CERTIFICATIONS
USL-TBIF-10W-2FT-916	10	1,100	110	UL
USL-TBIF-10W-2FT-1516	10	1,300	130	UL, DLC
USL-TBIF-20W-4FT-916	20	2,200	110	UL
USL-TBIF-20W-4FT-1516	20	2,600	130	UL, DLC

## DIMENSIONS

MODEL	L FIXTURE LENGTH	W LIGHT WIDTH	H LIGHT HEIGHT
<b>USL-TBIF-10W-2FT-916</b>	23.96 in 608 mm	0.56 in 14 mm	0.48 in 12 mm
<b>USL-TBIF-10W-2FT-1516</b>	23.96 in 608 mm	0.93 in 24 mm	0.51 in 13 mm
<b>USL-TBIF-20W-4FT-916</b>	47.96 in 1218 mm	0.56 in 14 mm	0.48 in 12 mm
<b>USL-TBIF-20W-4FT-1516</b>	47.96 in 1218 mm	0.93 in 24 mm	0.51 in 13 mm

## DRIVER

MODEL	DESCRIPTION
<b>USL-TBIF-ACC-PWR-30W</b>	30W power supply for up to 3 units of 2-foot fixture AC100-277V, 0-10V dimming Low voltage via RJ45 terminal
<b>USL-TBIF-ACC-PWR-60W</b>	60W power supply for up to 3 units of 4-foot fixture AC100-277V, 0-10V dimming Low voltage via RJ45 terminal

