

PROJECT		TYPE		DATE	
---------	--	------	--	------	--


 Interior
  Dimmable
  AC
  Down Light
  5 Year Warranty
  ETL LISTED

OVERVIEW

This back-lit flat panel has output options up to 6,000 lumens.

FEATURES

- PF > 0.9
- 110°
- Back-lit
- IP40
- 0-10V dimming

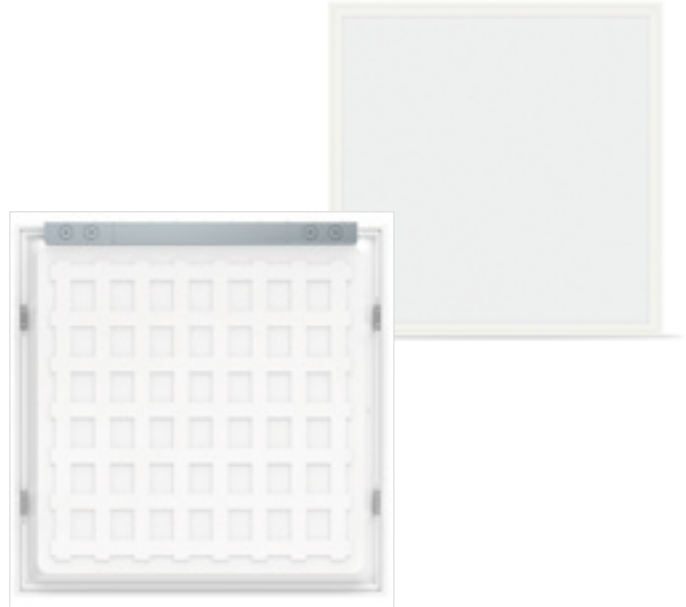

ORDERING INFORMATION

EXAMPLE PN: USL-FPHID-2X4-48WH-40K

USL-FPHID	SIZE / POWER	CCT
1X4-40WL	1X4 40 WATTS, 105 LM/W	27K 2700K
1X4-40WH	1X4 40 WATTS, 125 LM/W	30K 3000K
2X2-40WL	2X2 40 WATTS, 105 LM/W	35K 3500K
2X2-40WH	2X2 40 WATTS, 125 LM/W	40K 4000K
2X4-40WH	2X4 40 WATTS, 125 LM/W	45K 4500K
2X4-48WL	2X4 48 WATTS, 105 LM/W	50K 5000K
2X4-48WH	2X4 48 WATTS, 125 LM/W	

SPECIFICATIONS

MODEL	OPERATION VOLTAGE	OPERATING TEMPERATURE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-FPHID	100-277	14°F - 104°F -10°C - 40°C	50,000 HOURS	2700K-5000K	80+	105-125

MODEL	SIZE	POWER (W)	LUMENS (lm) ±10%	EFFICACY (lm/W)
USL-FPHID-1X4-40WL	1x4	40	4,200	105
USL-FPHID-1X4-40WH			5,000	125
USL-FPHID-2X2-40WL	2x2	40	4,200	105
USL-FPHID-2X2-40WH			5,000	125
USL-FPHID-2X4-40WH	2x4	48	5,000	125
USL-FPHID-2X4-48WL			5,040	105
USL-FPHID-2X4-48WH			6,000	125
USL-FPHID-2X4-48WL			6,000	125

DIMENSIONS

