

# INTERIOR USL-GLDIS GroDisk Flowering Light



Interior



Wet Location



Warranty



## OVERVIEW

This grow light contains 10 modules which can be configured a variety of shapes. Each module features a built-in heat sink eliminate the need for fans.

## FEATURES

- IP66
- Efficacy: 2.3 umol/J
- Average PPF: 900umol/m<sup>2</sup>/S
- Mounting height 2 feet above canopy
- 600W LED replaces 1,000W HPS
- Coverage area: 4x4 feet
- Uniform light intensity



## ORDERING INFORMATION

EXAMPLE PN: USL-GLDIS-600W-120V

USL-GLDIS	-	POWER*	-	VOLTAGE
		<b>600W</b> 10 MODULES, 600W		<b>120V</b> 120V
				<b>240V</b> 240V

Note: This fixture is composed of 10 60 Watt modules.

# INTERIOR USL-GLDIS GroDisk Flowering Light



## SPECIFICATIONS


MODEL	OPERATION VOLTAGE	OPERATING TEMPERATURE	RATED LIFESPAN	CCT	EFFICACY
USL-GLDIS	120V, 240V AC	-40°F – 122°F -40°C – 50°C	50,000 HOURS	FULL SPECTRUM	2.3 umol/j

MODEL	PPFD	EFFICACY	POWER	REPLACES HPS
USL-GLDIS-600W	900 umol/m <sup>2</sup> /S	2.3 umol/j	600 W	1000 W


## DIMENSIONS\*

PORTION	L	W	H	WEIGHT
<b>1 MODULE: 60W</b>	8 in 203 mm	8.9 in 225 mm	2.75 in 70 mm	2.98 lb 1.4 kg
<b>HALF FIXTURE: 300W</b>	40 in 1016 mm	8.9 in 225 mm	2.75 in 70 mm	15.2 lb 6.9 kg
<b>FULL FIXTURE: 600W</b>	40 in 1016 mm	2x 8.9 in 2x 225 mm	2.75 in 70 mm	30.2 lb 13.7 kg


Note: Dimensions assume a continuous line of 1x4 or 2x4. Due to the modular nature, additional configurations are available and will affect overall dimensions.

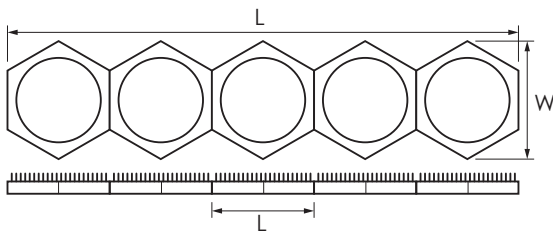

## LIGHT SPECTRUM

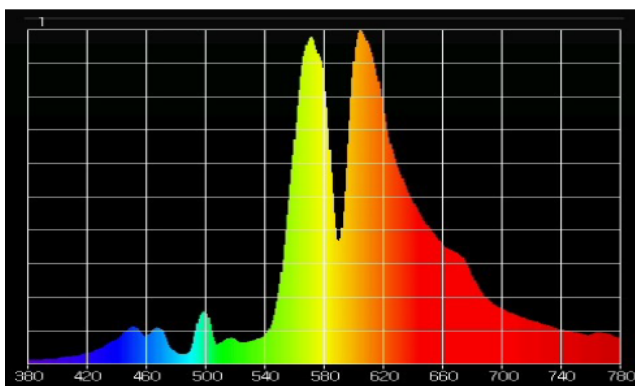

HPS GROW LIGHT

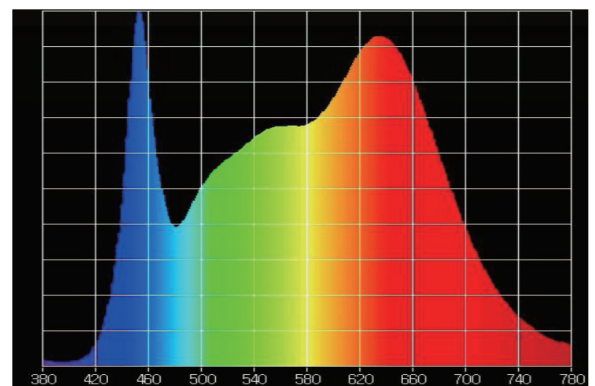

LED GROW LIGHT