

USL-DC12S

Ceiling Fixture



Features

Housing

Die-formed Cold-rolled Steel
Finish Option: -62 Satin Nickel, -30 Oil Rubbed Bronze

Optical

Shade: High Transmission Glass Create Excellent Light Distribution and Uniformity
LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

Lamp


LED Type: Built-in (More Color Temperature Option – 3500K, 5000K)

Certifications

ETL/cETL Listed

Warranty

5 Years Warranty on Driver and LED Module

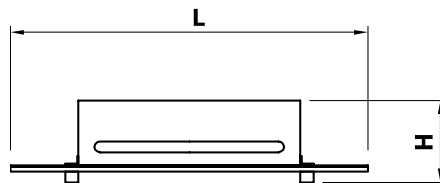

LED Type

Model	Input Voltage	Power	LED CT	CRI	Lumen (Typ)	Dimension (L X W X H)	Finish	Energy Star
USL-DC12S-21W-30K	120V ~ 277V	21W	3000K	>80	1550	13.0" x 13.0" x 3.8"	Satin Nickel	
USL-DC12S-21W-40K	120V ~ 277V	21W	4000K	>80	1640	13.0" x 13.0" x 3.8"	Satin Nickel	