

ARCHITECTURAL USL-SCU3Q Agnes Suspended Pendant




PROJECT		TYPE		DATE	
---------	--	------	--	------	--

Architectural
 Interior
 Damp Location
 Dimmable
 AC
 Up/Down
 5 Year Warranty
 ETL LISTED

OVERVIEW

The Agnes pendant is circular with up/down light. It comes standard with 0-10V dimming; TRIAC and DALI are optional. Available as single rings or tiers of 2-5 rings.

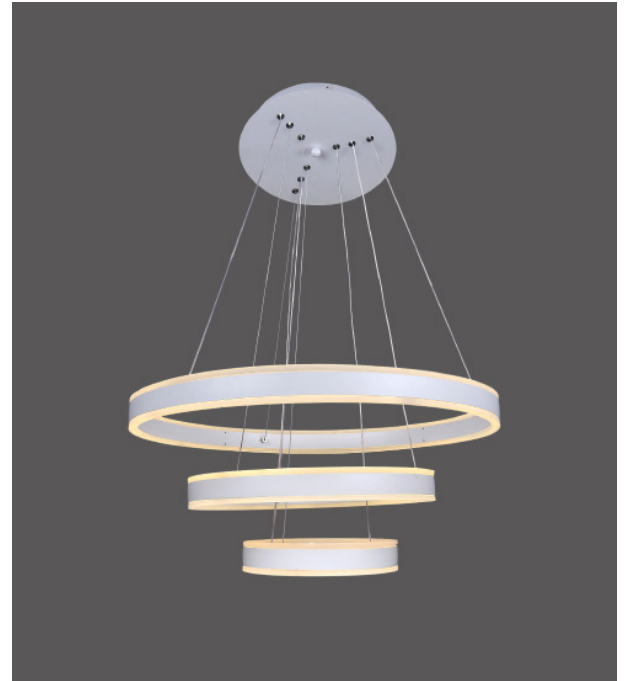

FEATURES

- Damp location
- 280° beam angle
- Direct & indirect lights
- Can group 2-5 tiers together
- IP20
- 0-10V dimming

ORDERING INFORMATION

EXAMPLE PN: USL-SCU3Q-40-80W-30K-10V-W

USL-SCU3Q	SIZE / POWER	CCT	DIMMING	FINISH
16-30W	16 INCH 30 WATTS	30K 3000K	10V 0-10V	W WHITE
24-50W	24 INCH 50 WATTS	35K 3500K	TRI TRIAC	B BLACK
32-60W	32 INCH 60 WATTS	40K 4000K		S SILVER
40-80W	40 INCH 80 WATTS	50K 5000K		#### CUSTOM RAL (ENTER CODE)
48-90W	48 INCH 90 WATTS			
60-100W	60 INCH 100 WATTS			

ARCHITECTURAL USL-SCU3Q

Agnes Suspended Pendant



SPECIFICATIONS

MODEL	OPERATION VOLTAGE	OPERATING TEMPERATURE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-SCU3Q	120-277V	-4°F – 104°F -20°C – 40°C	50,000 HOURS	3000K, 3500K, 4000K, 5000K	90+	64-70 lm/W

MODEL	POWER (W)	DIAMETER	LUMENS (lm) ±10%				EFFICACY (lm/W)
			3000K	3500K	4000K	5000K	
USL-SCU3Q-16-30W	30	16 inch	1,917	1,976	2,037	2,100	64-70
USL-SCU3Q-24-50W	50	24 inch	3,194	3,293	3,395	3,500	64-70
USL-SCU3Q-32-60W	60	32 inch	3,833	3,952	4,074	4,200	64-70
USL-SCU3Q-40-80W	80	40 inch	5,111	5,269	5,432	5,600	64-70
USL-SCU3Q-48-90W	90	48 inch	5,750	5,928	6,111	6,300	64-70
USL-SCU3Q-60-100W	100	60 inch	6,389	6,586	6,790	7,000	64-70

DIMENSIONS

MODEL	D DIAMETER
USL-SCU3Q-16-30W	15.7 in 400 mm
USL-SCU3Q-24-50W	23.6 in 600 mm
USL-SCU3Q-32-60W	31.5 in 800 mm
USL-SCU3Q-40-80W	39.4 in 1000 mm
USL-SCU3Q-48-90W	47.2 in 1200 mm
USL-SCU3Q-60-100W	59.1 in 1500 mm