

SIGNAGE USL-MMC1M

Mini Module C series




 Signage
  Exterior
  Interior
  Damp Location
  Dimmable
  RGB
  3 Year Warranty

OVERVIEW

This thin mini-modules are waterproof and are available with 0-10V dimming. They are suitable for illuminating channel letters. With a lower luminous output, these modules are better suited to signage located closer to the viewer, where other modules are overkill.

FEATURES

- IP67
- 0-10V dimming
- 3 or 4 LEDs per module
- 60-86W can be put together on one power supply

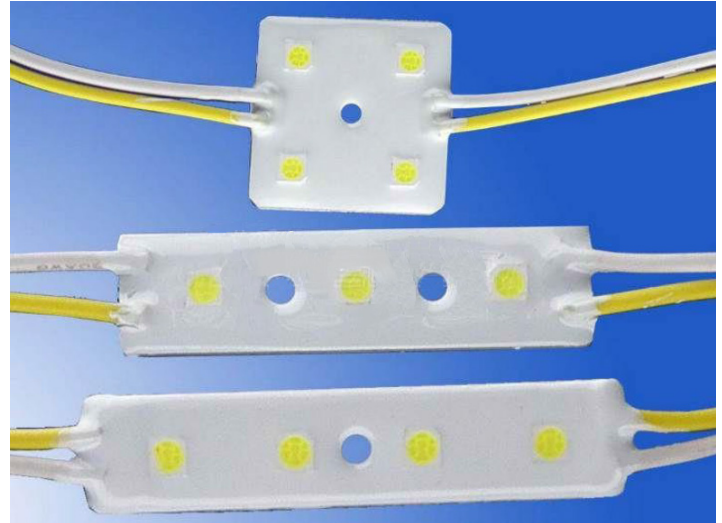

ORDERING INFORMATION

EXAMPLE PN: USL-MMC1M-3L-RGB-0

USL-MMC1M	LED QTY/SHAPE*	CCT*	DIMMING
3L	3 LEDs, LINEAR	30K 2700K-3200K	0 NONE
4L	4 LEDs, LINEAR	45K 4200K-4700K	10V 0-10V
4S	4 LEDs, SQUARE	60K 6000K-6500K	
		RGB RGB	

*Note: RGB only available with 3L

SPECIFICATIONS

MODEL	OPERATION VOLTAGE	OPERATING TEMPERATURE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-MMC1M	12V DC	-22°F – 122°F 30°C – 50°C	50,000 HOURS	3000K, 4500K, 6000K, RGB	75+	100 lm/W white 21 lm/W RGB

MODEL	MODULES/FOOT	POWER (W/ft)*	LUMENS (lm/ft)	CURRENT (mA)	EFFICACY (lm/W)	MAX CONNECTION LENGTH
USL-MMC1M-3L	1.4	1.0	87.8	60	100	90 modules, 65 feet
USL-MMC1M-3L-RGB	1.4	1.0	18.3	60	20.8	90 modules, 65 feet
USL-MMC1M-4L	1.7	1.66	112.2	80	100	90 modules, 52 feet
USL-MMC1M-4S	1.4	1.3	131.7	80	100	62 modules, 45 feet

DIMENSIONS

