

EXTERIOR USL-GSC1C 23-Inch Square Canopy Light



Exterior



Wet Location



Warranty




OVERVIEW

This slim surface-mounted canopy light is ideal for gas stations and garages. It includes an aluminum heat sink for excellent thermal management. The attached cable is 13 inches long.

FEATURES

- Ultra-slim profile less than 1 inch thick
- Extra-large 15-inch lens
- IP65
- 120° beam angle
- PF >0.95
- Wet location listed
- DLC Premium

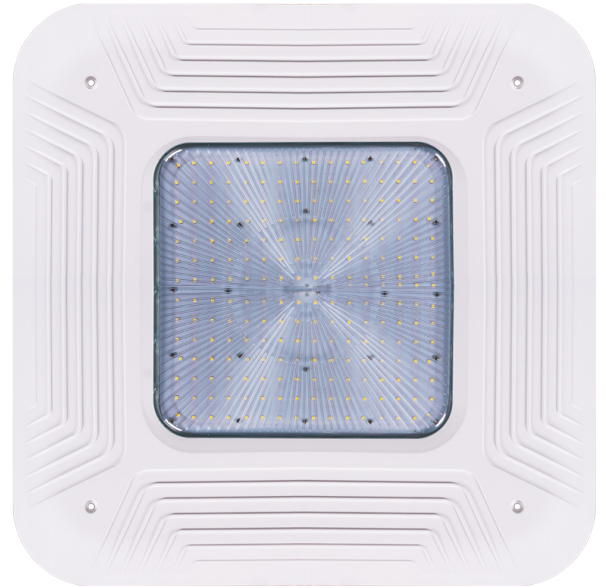

ORDERING INFORMATION

EXAMPLE PN: USL-GSC1C-150W-50K-EXT

USL-GSC1C	-	POWER	-	CCT	-	DRIVER
		150W 150 WATTS		30K 3000K 40K 4000K 50K 5000K 60K 6000K		EXT EXTERNAL DRIVER

SPECIFICATIONS

MODEL	OPERATION VOLTAGE	OPERATING TEMPERATURE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-GSC1C	100-277V AC	-22°F – 122°F -30°C – 50°C	100,000 HOURS	3000K, 4000K, 5000K, 6000K	70+	121-126 lm/W

MODEL	POWER (W)	CCT	LUMENS (lm)	EFFICACY (lm/W)	REPLACE HPS (W)
USL-GSC1C-150W-30K-EXT	150	3000K	18,169	121	400-500W
USL-GSC1C-150W-40K-EXT	150	4000K	18,418	123	400-500W
USL-GSC1C-150W-50K-EXT	150	5000K	18,700	125	400-500W
USL-GSC1C-150W-60K-EXT	150	6000K	18,860	126	400-500W

DIMENSIONS

MODEL	A LENS SIZE	L LENGTH	T THICKNESS	H HEIGHT	WEIGHT
USL-GSC1C	15 in 380 mm	23 in 585 mm	0.59 in 15 mm	6.87 in 174.5 mm	9.5 lb 4.3 kg

