

# ARCHITECTURAL USL-STIIF

## Semi-Transparent I-Beam Linear Fixture



PROJECT		TYPE		DATE	
---------	--	------	--	------	--











Architectural Interior Damp Location Dimmable AC Up/Down CCT Select Warranty


### OVERVIEW

This pendant light has a translucent surface while the luminaire is off. While on, indirect light is emitted from this surface along with uplight and downlight from the top and bottom faces of the fixture.



### FEATURES

- CCT selectable models (30K/35K/40K)
- UGR<19 available (black louver option)
- THD < 20%
- PF > 0.9
- Continuous connection (up to 40ft)
- Hang from drywall ceilings or grid ceilings.

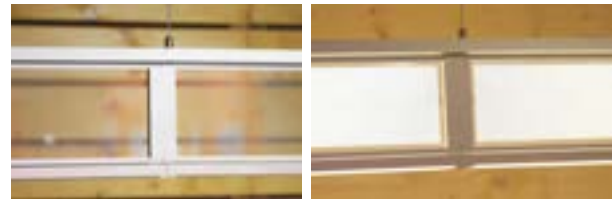

### ORDERING INFORMATION

EXAMPLE PN: USL-STIIF-4-40W-CS-UD-10V-EM

USL-STIIF	SIZE / POWER	CCT	LENS	DIMMING	OPTIONS
	<b>4-40W</b> 4FT, 40W	<b>CS</b> CCT-SELECTABLE <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>UD</b> DIFFUSER LENS, UP/DOWN <b>DD</b> DIFFUSER LENS, DOWN LIGHT <b>DL</b> LOUVER LENS, DOWN LIGHT	<b>10V</b> 0-10V	<b>0</b> NONE <b>EM</b> EMERGENCY

### ACCESSORIES

See part numbers on page 2.

# ARCHITECTURAL USL-STIIF

## Semi-Transparent I-Beam Linear Fixture




### SPECIFICATIONS

MODEL	OPERATION VOLTAGE	OPERATING TEMPERATURE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-STIIF	110-277	-4°F – 104°F -20°C – 40°C	50,000 HOURS	SELECTABLE, 3000K-4000K	80+ STANDARD 90+ OPTIONAL	90-100 lm/W

MODEL	POWER (W)	LENS	LUMENS (lm) ±10%	DISTRIBUTION	OPTIONS	EFFICACY (lm/W)
USL-SLIIF-4-40W	40W	diffuser	4,000	Direct, Indirect	—	100 lm/W
		louver	3,600	Direct	UGR<19	90 lm/W

### DIMENSIONS

MODEL	L LENGTH	W WIDTH	H HEIGHT
USL-SLIIF-4	46.5 in	1.3 in	7.48 in

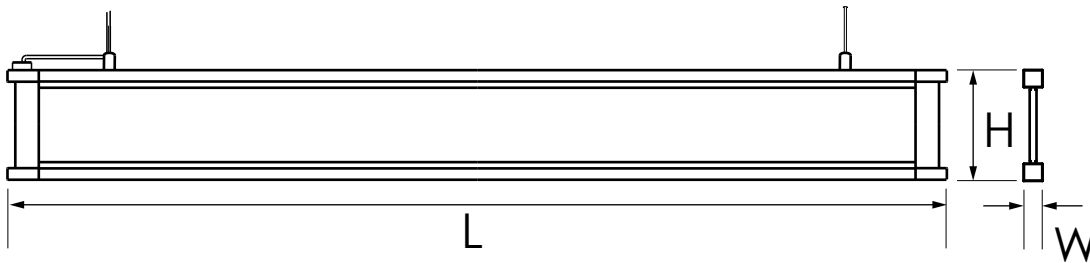

### ACCESSORIES

#### ACCESSORIES

USL-STIIF-ACC	-	ACCESSORY
---------------	---	-----------

- SMNT** Suspension mounting kit
- DCMNT** Mounting kit for drop ceiling
- EM** Emergency battery



STANDARD SUSPENSION MOUNTING KIT



DROPPED CEILING MOUNTING KIT

