

INTERIOR USL-ML3Q Moon Light



PROJECT		TYPE		DATE	
---------	--	------	--	------	--




OVERVIEW

This drum light can be mounted as a pendant, recessed, or surface mount. The standard model is available in down light only, but an up/down model is available to remove the dark spot in the ceiling above large suspended fixtures.

FEATURES

- IP20
- Recessed, pendant, or surface mounting
- 120° beam
- Up/down models available

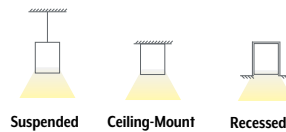

PENDANT (DOWN)



FLUSH (UP/DOWN)



RECESSED (NO TRIM)



RECESSED (WITH TRIM)

ORDERING INFORMATION

EXAMPLE PN: USL-ML3Q-36-90W-PD-30K

USL-ML3Q	SIZE / POWER ^{[1] [2]}	CCT	MOUNTING ^[1]	FINISH
	12-15W 12-INCH, 15 WATTS	30K 3000K	PD PENDANT (DOWN LIGHT)	W WHITE
	16-20W 16-INCH, 20 WATTS	40K 4000K	FD FLUSH (DOWN LIGHT)	B BLACK
	20-25W 20-INCH, 25 WATTS	65K 6500K	RT RECESSED (WITH TRIM)	RAL CUSTOM RAL COLOR FINISH
	24-40W 24-INCH, 40 WATTS		RN RECESSED (NO TRIM)	
	36-90W 36-INCH, 90 WATTS			
	48-180W 48-INCH, 180 WATTS			
	20-40W 20-INCH, 40 WATTS		PU PENDANT (UP/DOWN LIGHT)	
	24-65W 24-INCH, 65 WATTS		FU FLUSH (UP/DOWN LIGHT)	
	36-120W 36-INCH, 120 WATTS			
	48-220W 48-INCH, 220 WATTS			

VALID OPTIONS

	-PD -FD	-RT -RN	-PU -FU
12-	15W	NA	NA
16-	20W	20W	NA
20-	25W	25W	40W
24-	40W	40W	65W
36-	90W	90W	120W
48-	180W	180W	220W

[1] Note: 20/24/36/48 inch fixtures available with up and down light. Up/down model not available with 12 and 16 inch fixtures. Wattages vary between down and up/down models of the size diameter.

[1] Note: recessed fixture with trim is not available in 15W

[2] Dimensions listed here are nominal. Actual size varies based on mounting option.

INTERIOR USL-ML3Q Moon Light




SPECIFICATIONS

MODEL	OPERATION VOLTAGE	OPERATING TEMPERATURE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-ML3Q	120-277V	-4°F – 104°F -20°C – 40°C	50,000 HOURS	3000K 4000K, 6500K	80+	85 lm/W

MODEL	DOWN LIGHT ONLY		UP/DOWN LIGHT		EFFICACY (lm/W)
	POWER (W)	LUMENS (lm) ±10%	POWER (W)	LUMENS (lm) ±10%	
USL-ML3Q-12	15	1,275	NA	NA	85
USL-ML3Q-16	20	1,700	NA	NA	85
USL-ML3Q-20	25	2,125	40	3,400	85
USL-ML3Q-24	40	3,400	65	5,780	85
USL-ML3Q-36	90	7,650	120	10,200	85
USL-ML3Q-48	180	15,300	220	18,700	85

DIMENSIONS

MODEL	POWER (DOWN)	POWER (UP/DOWN)	PENDANT	
			D DIAMETER	H HEIGHT
USL-ML3Q-12	15W	NA	11.8 in 300 mm	1.77 in 45 mm
USL-ML3Q-16	20W	NA	15.8 in 400 mm	
USL-ML3Q-20	25W	40W	18.9 in 480 mm	3.14 in 80 mm
USL-ML3Q-24	40W	65W	23.6 in 600 mm	
USL-ML3Q-36	90W	120W	35.4 in 900 mm	
USL-ML3Q-48	180W	220W	47.3 in 1200 mm	

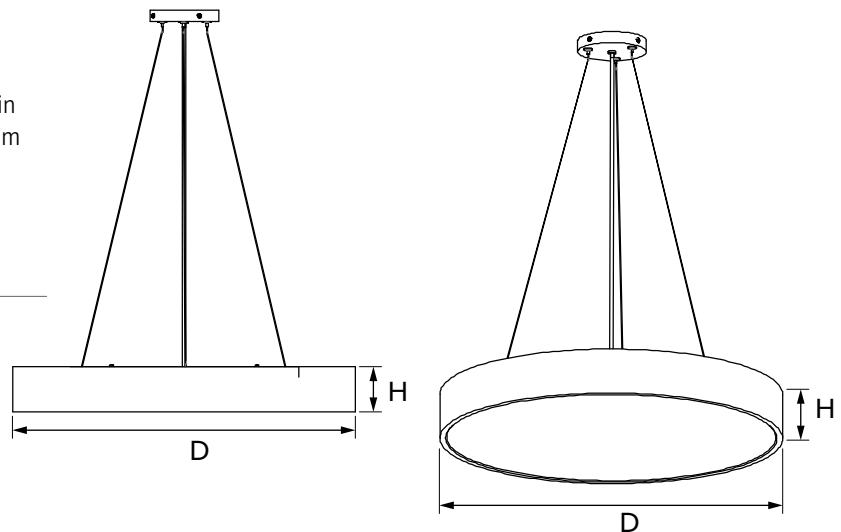


INTERIOR USL-ML3Q Moon Light



DIMENSIONS

MODEL	POWER (DOWN)	POWER (UP/DOWN)	FLUSH	
			D DIAMETER	H HEIGHT
USL-ML3Q-12	15W	NA	11.8 in 300 mm	2.56 in 65 mm
USL-ML3Q-16	20W	NA	15.8 in 400 mm	
USL-ML3Q-20	25W	40W	18.9 in 480 mm	3.74 in 95 mm
USL-ML3Q-24	40W	65W	23.6 in 600 mm	
USL-ML3Q-36	90W	120W	35.4 in 900 mm	
USL-ML3Q-48	180W	220W	47.3 in 1200 mm	

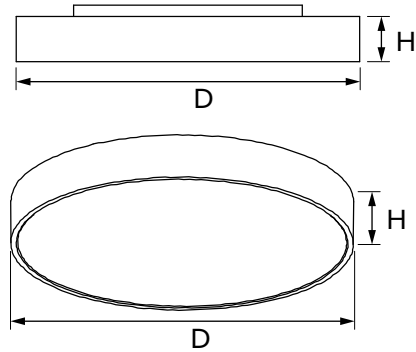

DIMENSIONS

MODEL	POWER (DOWN)	RECESSED (TRIM)		RECESSED (TRIMLESS)	
		D DIAMETER	H HEIGHT	D DIAMETER	H HEIGHT
USL-ML3Q-12	15W	NA	NA	12.6 in 320mm	1.77 in 45 mm
USL-ML3Q-16	20W	16.9 in 430 mm	1.77 in 45 mm	16.5 in 420 mm	
USL-ML3Q-20	25W	20.1 in 510 mm	3.14 in 80 mm	19.7 in 500 mm	3.14 in 80 mm
USL-ML3Q-24	40W	24.8 in 630 mm		24.4 in 620 mm	
USL-ML3Q-36	90W	36.6 in 930 mm		36.2 in 920 mm	
USL-ML3Q-48	180W	48.9 in 1230 mm		48.0 in 1220 mm	

