

# EXTERIOR USL-WPC1A Classic Wall Pack



Exterior Dimmable Wet Location 5 Year Warranty DLC UL

## OVERVIEW

The US Luminaire classic wall pack series has been designed and built with high performance, efficiency and cost effectiveness in mind. The LEDs are housed in a sealed compartment separate from the drivers to keep them cool. A bubble level is built in and a gasket is included to ensure proper and simple installation. The unit is lightweight and extremely durable.



## FEATURES

- 0-10V dimming
- Sealed die-cast profile for indoor and outdoor applications
- Polycarbonate optical lens with UV stabilizers
- Supports emergency battery
- Replaces 100W MH to 400W MH
- PIR motion sensor

## ORDERING INFORMATION

EXAMPLE PN: USL-WPC1A-95W-HV-40K-D-0-0  
EXAMPLE PN: USL-WPC1A-90W-LV-40K-D-MS-P1

USL-WPC1A	POWER*	VOLTAGE*	CCT	FINISH	OPTIONS*	PHOTOCELL*
	<b>30W</b> 30 WATTS	<b>LV</b> 120-277V	<b>40K</b> 4000K	<b>B</b> BLACK	<b>0</b> NONE	<b>0</b> NONE
	<b>45W</b> 45 WATTS		<b>50K</b> 5000K	<b>D</b> DARK BRONZE	<b>10V</b> 0-10V DIMMING	<b>P1</b> 120V
	<b>70W</b> 70 WATTS			<b>W</b> WHITE	<b>MS</b> DIMMING, MOTION SENSOR	<b>P2</b> 277V
	<b>90W</b> 90 WATTS				<b>EM</b> DIMMING, EMERGENCY POWER	
	<b>135W</b> 135 WATTS				<b>EMS</b> DIMMING, MOTION SENSOR, EMERGENCY POWER	
	<b>40W</b> 40 WATTS	<b>34V</b> 347V				
	<b>50W</b> 50 WATTS					
	<b>60W</b> 60 WATTS					
	<b>75W</b> 75 WATTS					
	<b>95W</b> 95 WATTS	<b>HV</b> 347/480V				
	<b>140W</b> 140 WATTS					
	<b>145W</b> 145 WATTS					

\*Note: 135W version not available with emergency power. 347 and 480V not available with dimming, motion sensor, or emergency power.

30/45/70/90/135W available with 120-277V, 40/50/60/75 available with 347V, 95/140/145W available with 347/480V.

# EXTERIOR USL-WPC1A Classic Wall Pack




## SPECIFICATIONS

MODEL	OPERATION VOLTAGE	AMBIENT OPERATING TEMP	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-WPC1A	120-277V	-40°C – 40°C -40°F – 104°F	50,000 HOURS	4000K 5000K	70+	109-113 lm/W

MODEL	POWER (W)	VOLTAGE	LUMENS (lm) ±10%		EFFICACY (lm/W)	HID REPLACEMENT	WEIGHT (lb)	OPTIONS
			4000K	5000K				
USL-WPC1A-30W-LV	30	120-277	3,300	3,400	110-113	100-175	7.0	DIMMING, EMERGENCY POWER, MOTION SENSOR
USL-WPC1A-45W-LV	45	120-277	5,050	5,100	112-113	175-250	7.1	
USL-WPC1A-70W-LV	70	120-277	7,900	7,950	113-114	250-320	7.4	
USL-WPC1A-90W-LV	90	120-277	10,400	10,550	116-117	320-400	10.9	
USL-WPC1A-135W-LV	135	120-277	15,350	15,750	114-117	400+	11.6	
USL-WPC1A-40W-34V	40	347	4,600	4,700	115-118	100-175	8.2	
USL-WPC1A-50W-34V	50	347	5,200	5,300	104-106	175-250	8.2	
USL-WPC1A-60W-34V	60	347	6,700	6,900	112-115	175-250	8.3	
USL-WPC1A-75W-34V	75	347	8,000	8,100	107-108	250-320	8.3	
USL-WPC1A-95W-HV	95	347/480	10,900	11,200	115-118	320-400	10.3	
USL-WPC1A-140W-HV	140	347/480	14,300	14,450	102-103	400+	11.2	
USL-WPC1A-145W-HV	145	347/480	15,600	16,400	108-113	400+	11.2	

## DIMENSIONS

MODEL	L LENGTH	D DEPTH	H HEIGHT
<b>30-75W</b>	14.21 in 361 mm	7.4 in 188 mm	9.25 in 235 mm
<b>90-145W</b>	18 in 457 mm	8.75 in 222 mm	9.75 in 248 mm

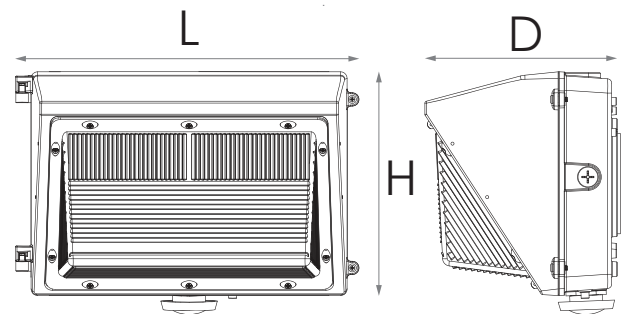

## PHOTOMETRICS

