

ARCHITECTURAL USL-SP32C Cascade Suspended Pendant



OVERVIEW

The circular Cascade pendant is built of a seamless aluminum body with an acrylic lens to evenly diffuse its down light. It is available in 2 ring sizes 16-24 inches and can be put in 2-level tiers. The suspension mounting allows for multiple rings to be placed even and concentric, or cable lengths can be adjusted to create a truly custom look.

FEATURES

- Down light
- Circular shape
- Rectangular profile
- 120° beam angle
- Custom configurations available
- RGB, RGBW, color tunable available



ORDERING INFORMATION

EXAMPLE PN: USL-SP32C-2-50W-40K-0-BRG

| USL-SP32C | SIZE / POWER | CCT | DIMMING | FINISH* |
|--------------|---------------------|--------------------------------------|------------------|---------------------------|
| 1-20W | 1 RING 20W 16" | 27K 2700K | 0 NONE | WHT MATTE WHITE |
| 1-30W | 1 RING 30W 24" | 30K 3000K | 10V 0-10V | BLK MATTE BLACK |
| 2-50W | 2 RINGS 50W 16" 24" | 35K 3500K | | SLV SILVER |
| | | 40K 4000K | | PTN PLATINUM |
| | | 50K 5000K | | BRG BURNISHED GOLD |
| | | RGB RGB | | RSG ROSE GOLD |
| | | RGB30 RGB+3000K | | DKB DARK BURGUNDY |
| | | RGB35 RGB+3500K | | |
| | | RGB40 RGB+4000K | | |
| | | RGB50 RGB+5000K | | |
| | | CT COLOR TUNING 3000-6000K | | |

*Note: Standard finishes are matte white and matte black.

ARCHITECTURAL USL-SP32C


Cascade Suspended Pendant



SPECIFICATIONS

| MODEL | OPERATION VOLTAGE | RATED LIFESPAN | CCT | CRI | EFFICACY |
|-----------|-------------------|----------------|-------------------------------------|-----|------------|
| USL-SP32C | 100-277V AC | 50,000 HOURS | 2700K, 3000K 3500K, 4000K, 5000K | 80+ | 60-75 lm/W |

| MODEL | RING SIZES (in) | POWER (W) | LUMENS (lm) at: | | | EFFICACY (lm/W) |
|-----------------|-----------------|-----------|-----------------|-------|-------|-----------------|
| | | | 3000K | 4000K | 5000K | |
| USL-SP32C-1-20W | 16 | 20 | 1,300 | 1,400 | 1,500 | 65-75 |
| USL-SP32C-1-30W | 24 | 30 | 1,950 | 2,100 | 2,250 | 65-75 |
| USL-SP32C-2-50W | 16, 24 | 50 | 3,000 | 3,250 | 3,500 | 60-70 |

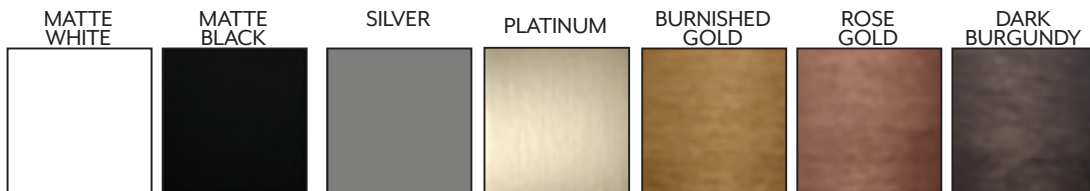



ARCHITECTURAL USL-SP32C Cascade Suspended Pendant



DIMENSIONS

Standard ring configurations below. Additional custom configurations available.

| MODEL | A RING 1 | B RING 2 | C RING 3 | WEIGHT | L LENGTH | H HEIGHT |
|-------|-----------------|-----------------|-------------|-------------------|------------------|-----------------|
| 1-20W | 16 in 400mm | NA | NA | 11.4 lb 2.7 kg | 9.8 in 250 mm | 2.4 in 60 mm |
| 1-30W | 24 in 600 mm | NA | NA | 7.9 lb 3.6 kg | | |
| 2-50W | 16 in 400mm | 24 in 600 mm | NA | 11.4 lb 5.2 kg | | |

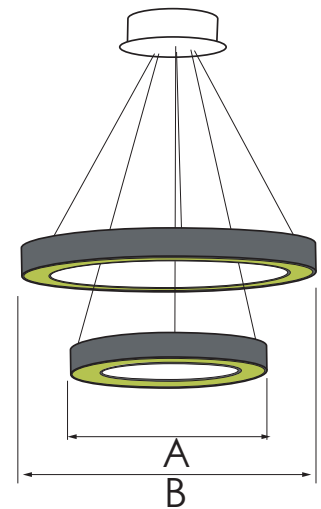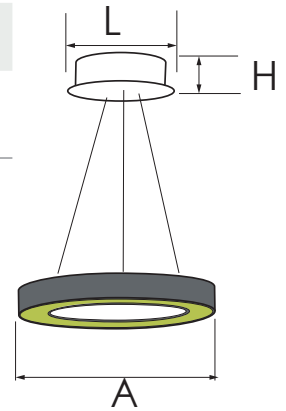

Profile view

