

# ARCHITECTURAL USL-SP52C Minnetonka Suspnded Pentant



PROJECT		TYPE		DATE	
---------	--	------	--	------	--

Architectural
 Interior
 Dry Location
 Dimmable
 AC
 Color Tuning
 Color Select
 RGB
 DMX
 Up/Down
 5 Year Warranty
 UL

## OVERVIEW

The Minnetonka pendant is rectangular with up and down light. It is built with seamless aluminum with a diffusing acrylic lens. RGB and color tuning options available. Works with DMX and Zigbee.

## FEATURES

- Up/down light
- Rectangular shape
- 360° beam angle
- 0-10V dimming
- DMX and Zigbee controls



## ORDERING INFORMATION

EXAMPLE PN: USL-SP52C-32-40W-DMX-CT-DB

USL-SP52C	SIZE / POWER	CONTROLS	CCT/COLOR	FINISH*
	<b>16-20W</b> 16"X8" 20W	<b>10V</b> 0-10V	<b>CS</b> COLOR-SELECTABLE	<b>BK</b> BLACK
	<b>24-30W</b> 24"X12" 30W	<b>DMX</b> DMX	3000K/3500K/4000K	<b>GW</b> GLOSSY WHITE
	<b>32-40W</b> 32"X16" 40W	<b>ZB</b> ZIGBEE	<b>CT</b> COLOR-TUNABLE	<b>SV</b> SILVER
	<b>40-50W</b> 40"X20" 50W		3000K-4000K	<b>DB</b> BRONZE
	<b>48-60W</b> 48"X24" 60W		<b>RGB30</b> RGBW WITH 3000K	
			<b>RGB40</b> RGBW WITH 4000K	

\*Note: Black, glossy white, silver, and bronze are standard colors. Additional premium colors available.

STANDARD COLORS

PREMIUM COLORS

# ARCHITECTURAL USL-SP52C Minnetonka Suspended Pendant



## SPECIFICATIONS



MODEL	OPERATION VOLTAGE	OPERATING TEMPERATURE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-SP52C	100-277V AC	-40°F – 122°F -40°C – 50°C	50,000 HOURS	3000K-4000K RGBW	80+	75-85 lm/W

MODEL	RING SIZE	POWER (W)	LUMENS (lm) ±10%			EFFICACY (lm/W)
			3000K	4000K	5000K	
USL-SP52C-16-20W	16x8	20	1,500	1,600	1,700	75-85
USL-SP52C-24-30W	24x12	30	2,350	2,450	2,550	78-85
USL-SP52C-32-40W	32x16	40	3,200	3,300	3,400	80-85
USL-SP52C-40-50W	40x20	50	4,050	4,150	4,250	81-85
USL-SP52C-48-60W	48x24	60	4,900	5,000	5,100	82-85

## DIMENSIONS

MODEL	L LENGTH	W WIDTH
USL-SP52C-16-20W	16 in	8 in
USL-SP52C-24-30W	24 in	12 in
USL-SP52C-32-40W	32 in	16 in
USL-SP52C-40-50W	40 in	20 in
USL-SP52C-48-60W	48 in	24 in

CANOPY	A HEIGHT	B LENGTH	C WIDTH
ALL	2.4 in	11 in	7.1 in

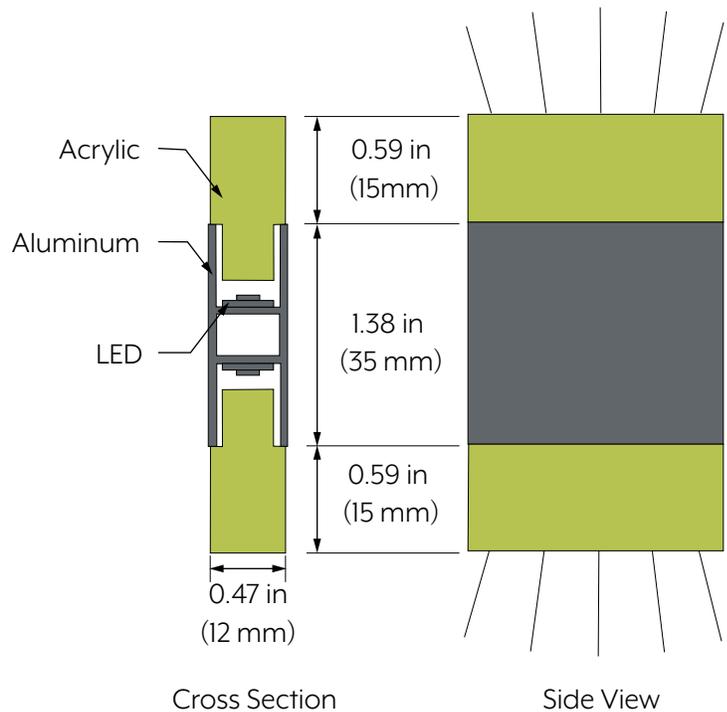

STANDARD MULTI-RING CONFIGURATIONS

SIZE	2 TIERS				3 TIERS	
	50W	90W	110W	150W	90W	150W
16x8	X				X	
24x12	X				X	
32x16		X			X	X
40x20		X	X			X
48x24			X			X

