

EXTERIOR USL-CNS1B Shallow Canopy Light



PROJECT	TYPE	DATE
---------	------	------

Exterior
 Wet Location
 Dimmable
 AC
 Up/Down
 5 Year Warranty
 DLC
 UL

OVERVIEW

This shallow canopy light features side-emitting light. This fixture is ideal for use in soffits to provide a wider illuminated area. It provides a little bit of uplight to remove the “cave” aesthetic created by dark spots in the ceiling.



FEATURES

- 0-10V dimming
- Surface-mounted fixture
- Optional motion sensor
- IP65
- PF>0.95
- 15% uplight
- 274° beam angle

ORDERING INFORMATION

EXAMPLE PN: USL-CNS1B-45W-LV-40K-D-10V

USL-CNS1B	SIZE / POWER	VOLTAGE	CCT	FINISH	OPTIONS
	45W 45 WATTS	LV 120-277V	40K 4000K	D DARK BRONZE	10V 0-10V DIMMING
	70W 70 WATTS		50K 5000K	W WHITE	MS MOTION SENSOR

EXTERIOR USL-CNS1B Shallow Canopy Light




SPECIFICATIONS

MODEL	OPERATION VOLTAGE	OPERATING TEMPERATURE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-CNS1B	120-277V AC	-22°F – 113°F -30°C – 45°C	50,000 HOURS	4000K, 5000K	80+	105-119 lm/W

MODEL	POWER (W)	REPLACES MH	LUMENS (lm) ±10%		EFFICACY (lm/W)
			4000K	5000K	
USL-CNS1B-45W	45	100-150W	5,200	5,375	116-119
USL-CNS1B-70W	70	150-200W	7,375	7,800	105-111

DIMENSIONS

MODEL	W WIDTH	H HEIGHT	A HEIGHT	WEIGHT
ALL	14 in 355 mm	4.3 in 109 mm	2.6 in 65 mm	9.3 lb 4.2 kg

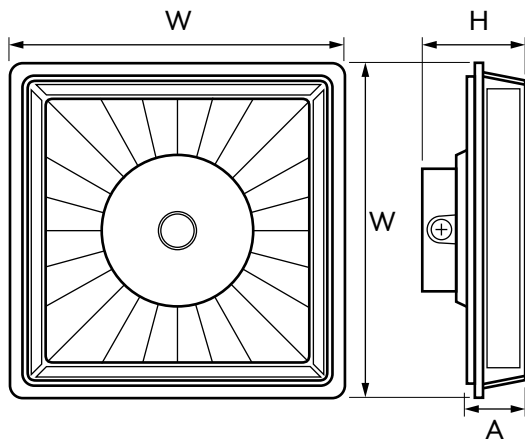

PHOTOMETRICS

